


Outdoor series fixed led display



Cabinets:

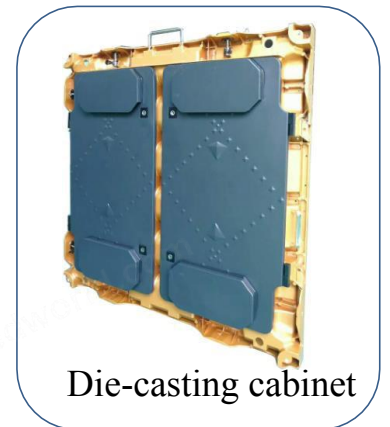

Features:

- Uniform color and high contrast ratio, bringing up fresh and natureal image;
- Low power consumption and fine heat release;
- Super wide viewing angle increasing its value by covering more audience;
- No deformation under sunlight by the use of anti-UV modules;
- High protection grade of IP65 achieved by patented mask design with waterproof and dustproof function;
- Safe and reliable operation ensured by stable signal and power supply.



Application:

outdoor advertising government project athletic contest Shopping Guide commercial real estate

Technical Specifications:

Items	P4mm	P5mm	P6mm	P8mm	P10mm	P10mm
Pixel	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Configuration	SMD2525	SMD2727	SMD3535	SMD3535	SMD3535	DIP346
Pixel Pitch	4mm	5mm	6mm	8mm	10mm	10mm
Pixel Density	62500 dots/m ²	40000 dots/m ²	27777 dots/m ²	15625 dots/m ²	10000 dots/m ²	10000 dots/m ²
Module Size(mm)	256x128	160x160	192x96or 192x192	256x128	320x160	160x160
Pixels/Module	64x32	32x32	32x16 or 32x32	32x16	32x16	16x16
Cabinet Size(mm)	768x768	960x960	960x960	1024x1024	960x960	960x960
Pixels/Cabinet	192x192	192x192	160x160	128x128	96x96	96x96
Cabinet Weight	24KG	36KG	36KG	41KG	36KG	38KG
Brightness	>5500cd/m ²	>5500cd/m ²	>6000cd/m ²	>5000cd/m ²	6500cd/m ²	>7500cd/m ²
Viewing Distance	>4m	>5m	>6m	>8m	>10m	>10m
Power	Max: 1300	Max: 1300	Max: 1300	Max: 1000	Max: 1000	Max: 1000
Consumption(W/m ²)	Ave: 300	Ave: 300	Ave: 260	Ave: 260	Ave: 300	Ave: 300
Driver Mode	1/8 scan	1/8 scan	1/4 scan or 1/8	1/4 scan or 1/8	1/2 scan	1/4 scan
Viewing Angle	H: 120°; V: 120°					H: 110°;V: 60°
Cabinet Material	Cold Rolled Steel or aluminium					
Refresh Rate	300-3000HZ adjustable					
LED Life	100,000 hours					
Supply Voltage	AC220V/50HZ; AC110V/60HZ					
Operating Temperature	-20°C ~ +50°C					
Operating Humidity	10% - 90%					
Gray Scale	Red, Green and Blue each 16K					
Display Color	4096 Billion					
IP Rating	Front IP65					
Display Capability	Text, Graph and Video					

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to Led World.